



FINZZI
SURFACES

Mott

LUXURY VINYL TILES


10 COLOURS
3 SIZES

Mott
Basalt
7"x48" /
18x122cm

Mott

Collection of neutral colors thta provide
peqace and comfort.

Sizes

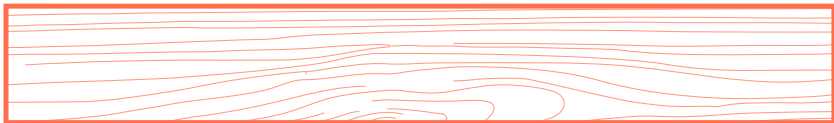

7" x 48" / 18 x 122cm



6" x 48" / 15 x 122cm



6" x 36" / 15 x 91cm

Product Typology



LVT Click




LVT Glue
Down



Sintered
Stone®




WPC Click



Loose lay



Real Touch®



Crystal
Emboss

Finishes

Colors

Bianco



Crema



Greige




Grey



Beige



Honey

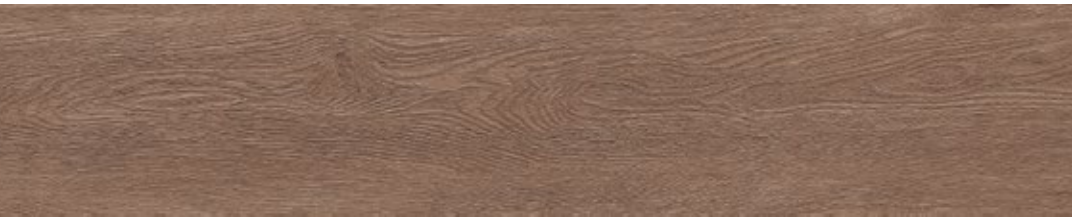

Roble




Taupe



Wengue



Basalt

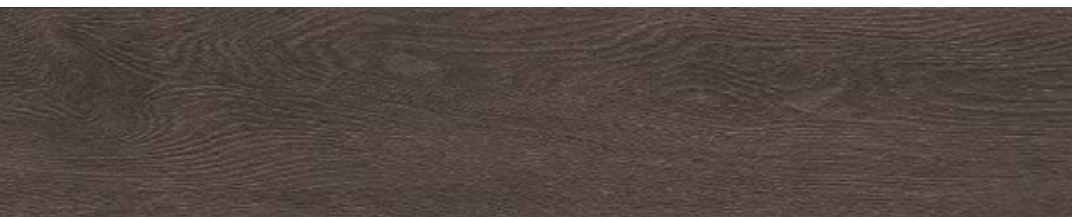

Mott Bianco



Mott
Bianco
7"x48" /
18x122cm

Mott Crema




Mott Greige



Mott
Greige
7"x48" /
18x122cm

Mott Grey

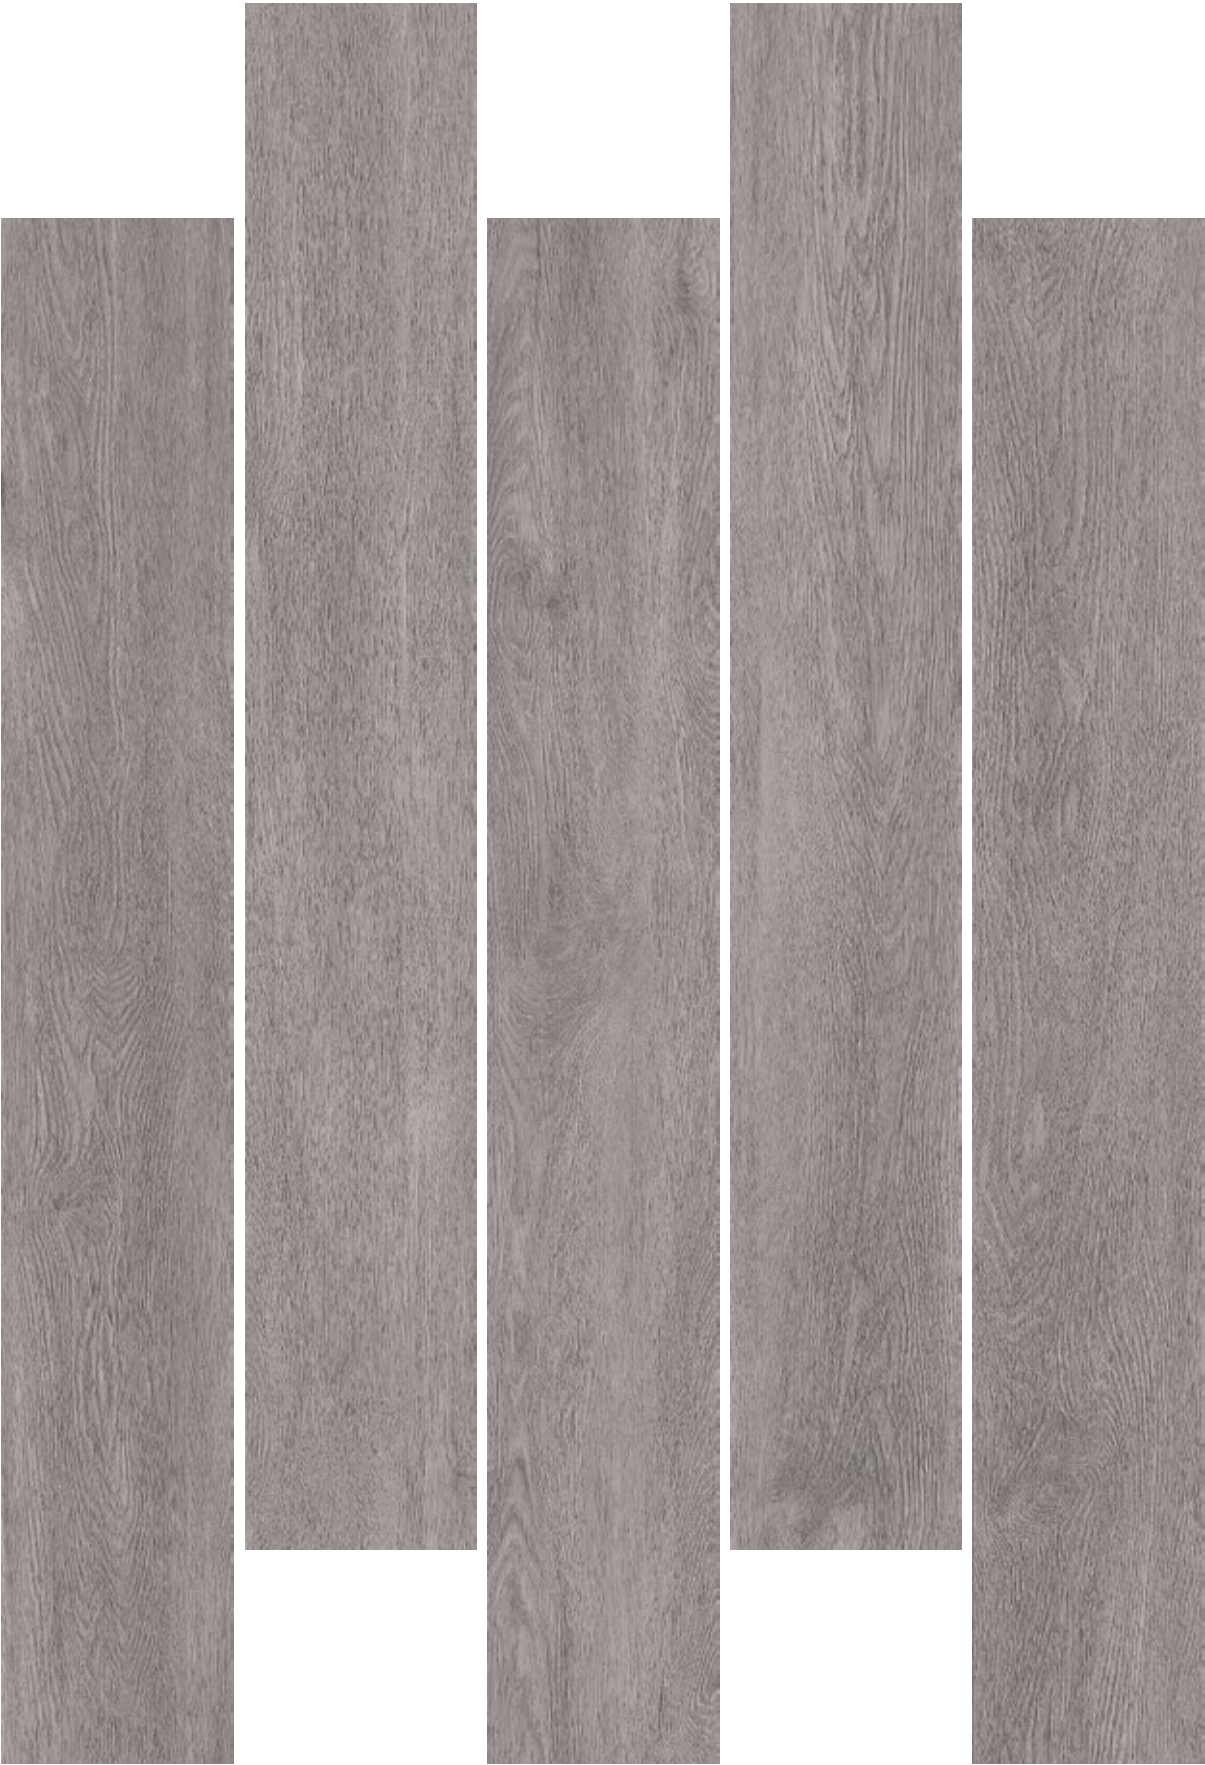

Mott
Grey
7"x48" /
18x122cm

FINZZI

Mott Grey




Mott
Grey
7"x48" /
18x122cm

Mott Beige



Mott
Beige
7"x48" /
18x122cm

Mott Honey

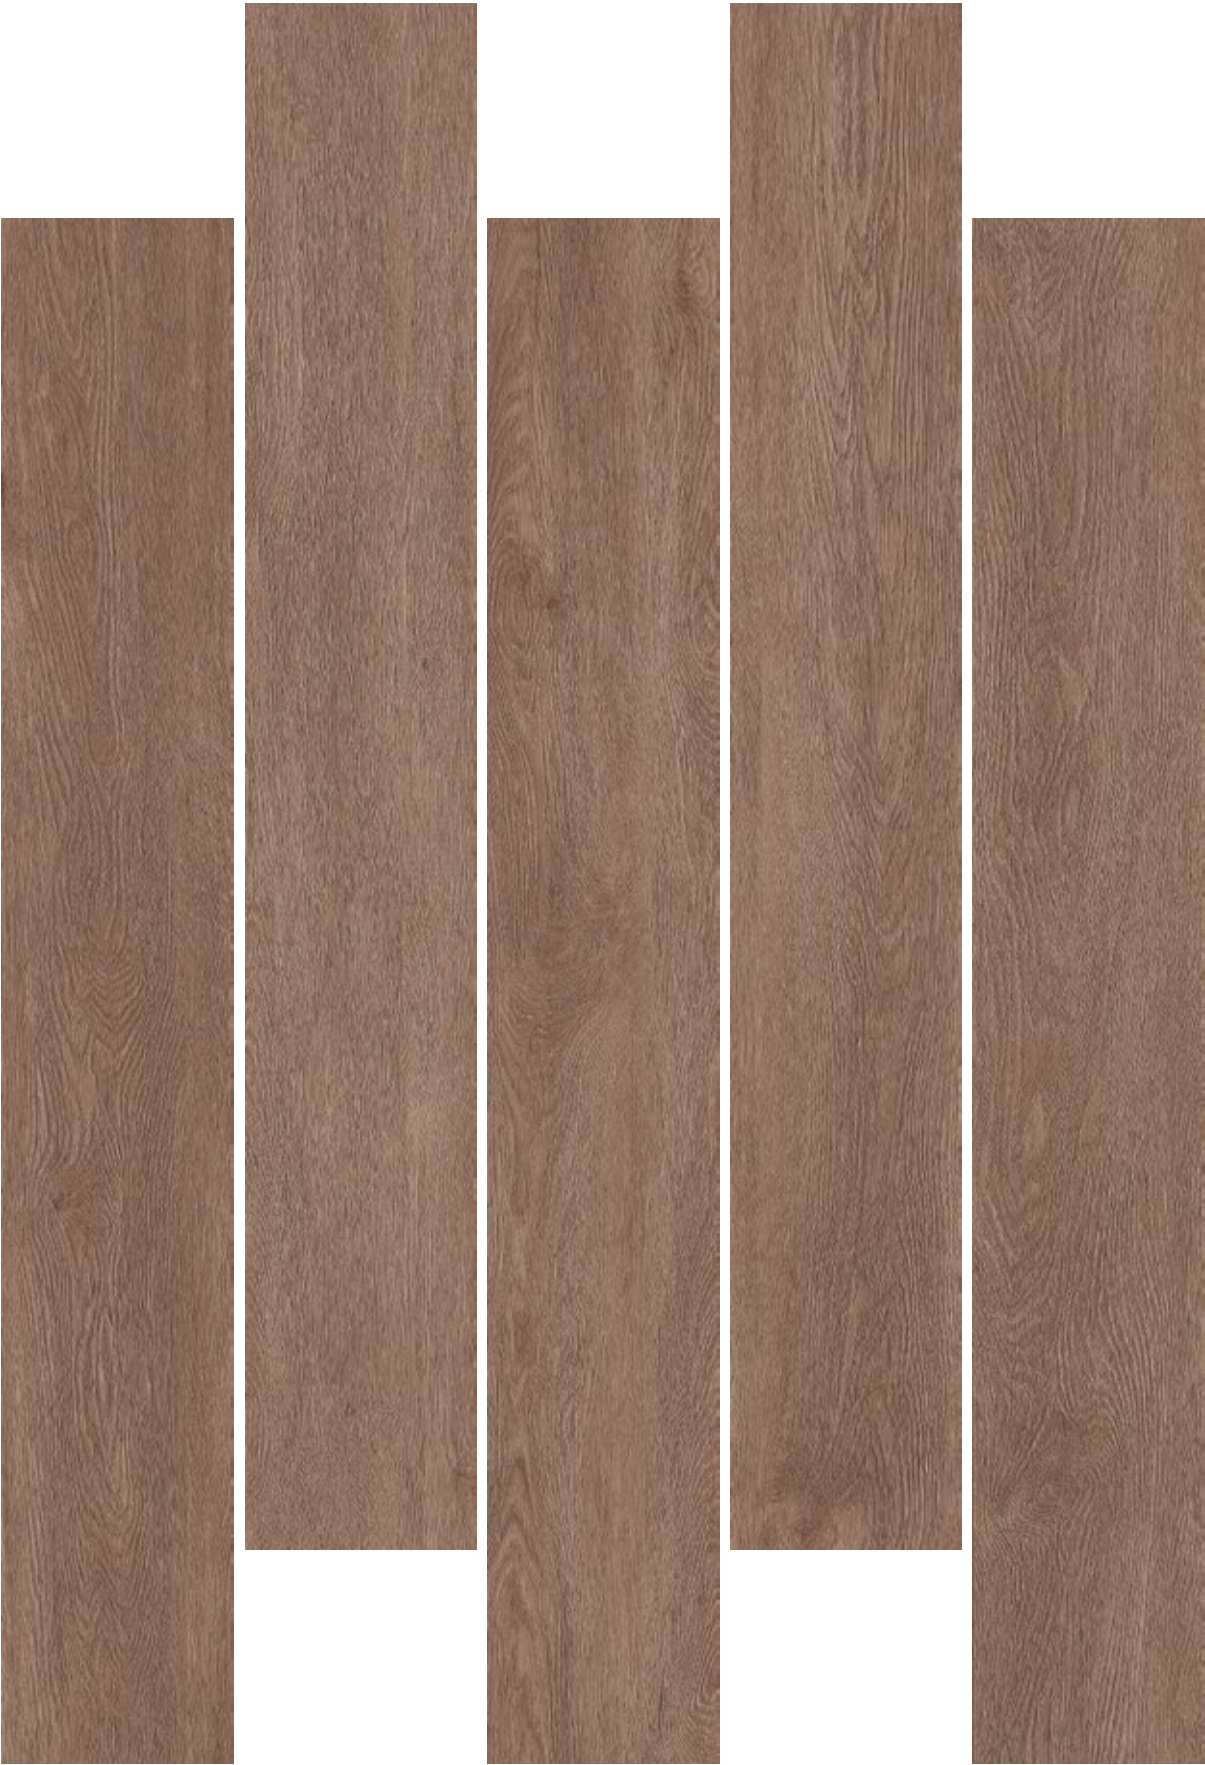

Mott
Honey
7"x48" /
18x122cm

Mott Roble




Mott Taupe



Mott Wengue



Mott Basalt

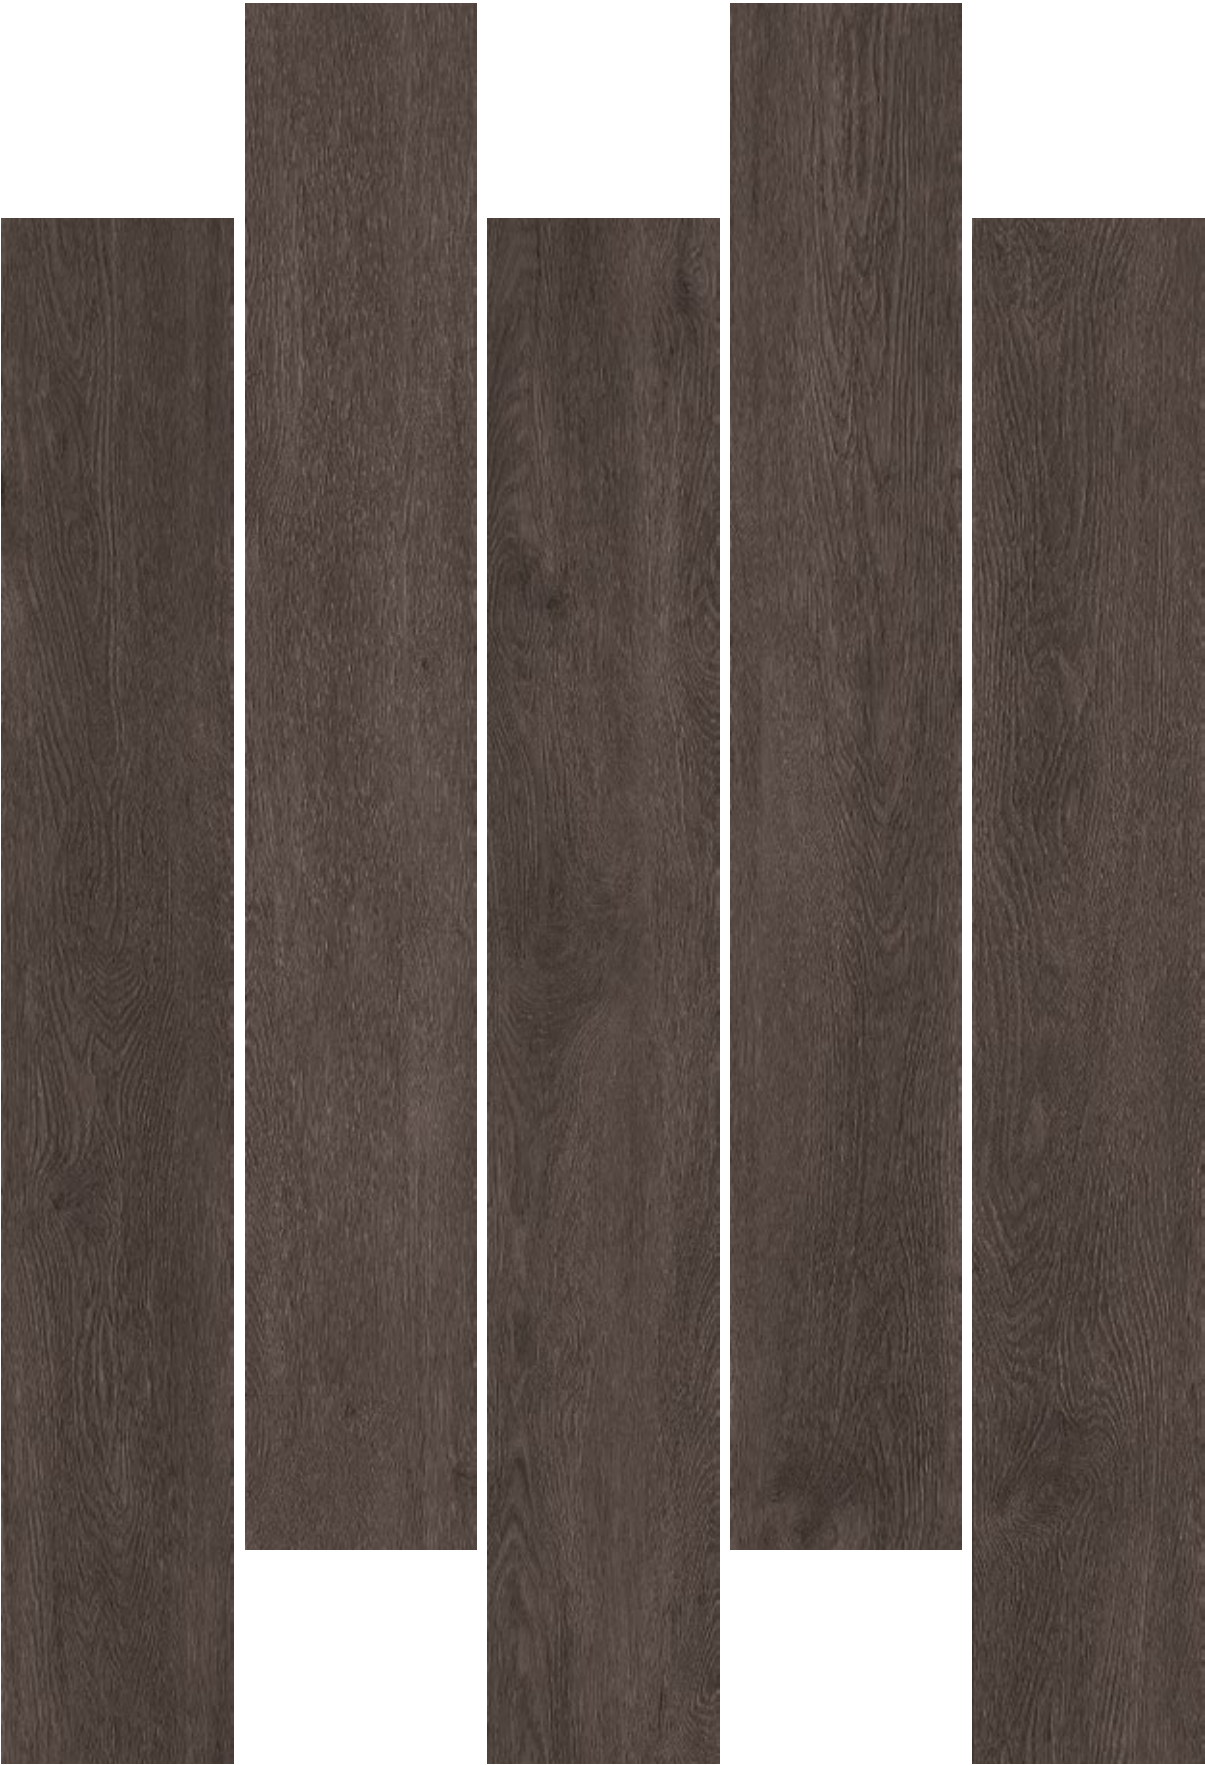

Mott
Basalt
7"x48" /
18x122cm

Product Advantages



Real Touch®

True to nature.

Real Touch®

Fiel a la naturaleza.



Drop'n' Click®

The perfect union.

Drop'n' Click®

La unión perfecta.



Elastic resilience

For greater comfort when walking, avoiding possible leaks and breaks due to impact.

Resiliencia elástica

Para un mayor comfort al caminar, evitando posibles fugas y roturas por impacto.



Fire prevention and flame retardant

If exist the flame, it will extinguish and not produce toxic substances and gases.

Prevención de incendios y retardante de llama

Si existe llama, se extinguirá y no producirá sustancias y gases tóxicos.



Strong acoustic insulation

Perfect sound deadening and noise reduction.

Fuerte aislamiento acústico

Perfecta amortiguación del sonido y reducción del ruido.



Warm flooring

Finzzi's floors offer to the space a comfortable & warm sensation.

Suelo cálido

Los suelos de Finzzi hacen posible una sensación térmica agradable.



Stain resistant & low maintenance

The top layer protects against knock and stains, they can be removed in seconds.

Resistente a las manchas y bajo mantenimiento

La capa superior protege contra golpes y manchas, pudiendo eliminarlos en segundos.



Waterproof

Moisture-resistance, ideal in kitchen or bathrooms.

Resistente al agua

Resistencia a la humedad, ideal en cocina o baños.



Floor & wall use

All our products can be applied to any surface, either floor or wall.

Uso para suelo y pared

Todos nuestros productos se pueden aplicar a cualquier superficie ya sea suelo o pared.



IXPE pad

Moisture barrier and sound proofing.

Pad IXPE

Barreda de humedad e insonorización.



Suitable for underfloor heating

Finzzi's floors are perfectly compatible with underfloor heating.

Preparado para suelo radiante

Los suelos de Finzzi son perfectamente compatibles con calefacción por suelo radiante.



Antislip

Firm under foot, with a slip resistance value of R10.

Antideslizante

Con un valor de resistencia al deslizamiento de R10.



High impact resistance

Does not leave traces or marks when supporting strong blows.

Alta resistencia al impacto

No deja huellas ni marcas al soportar golpes fuertes.



Wear Layer

Commercial grade wear layer protection.

Capa de protección

Capa de desgaste protectora para uso comercial.

PROFILING INFO



Flush stair nose A
2400x72x25mm
Escalón empotrado A
2400x72x25mm



Flush stair nose B
2400x115x25mm
Escalón empotrado B
2400x115x25mm



Skirting 90mm
2400x90x15mm
Rodapié 90mm
2400x90x15mm



Skirting 80mm
2400x80x15mm
Rodapié 80mm
2400x80x15mm



Stair nose
2400x58x18mm
Peldaño
2400x58x18mm



Reducer
2400x43x10mm
Reductor
2400x43x10mm



End-Cap
2400x35x7mm
Tapa de acabado
2400x35x7mm



T-molding
2400x46x7mm
Moldura en forma de T
2400x46x7mm



Quarter round
2400x28x16mm
Cuarto de circunferencia
2400x28x16mm

Profiling	Flooring Thickness	Pcs/box	Kg/box
T-moulding 2400x46x7mm	4~8mm	20	10
Reducer 2400x43x10mm	4~8mm	20	15
End-Cap 2400x35x7mm	4~8mm	20	14
Stair Nose 2400x54x18mm	4~8mm	10	11
Flush Stair Nose A 2400x72x25mm	4~8mm	10	15
Flush Stair Nose B 2400x115x25mm	4~8mm	10	18
Quarter Round 2400x28x16mm	4~8mm	25	17
Skirting 2400x90x15mm	4~8mm	10	20
Skirting 2400x80x15mm	4~8mm	10	11

NOTE: The thickness of the profiling might vary slightly according to the thickness of the flooring
NOTA: El espesor del perfil puede variar ligeramente de acuerdo con el espesor del suelo.

TECHNICAL INFORMATION

TECHNICAL PERFORMANCES	STANDARDS	MOTT
Dimensional stability	EN ISO 23999	≤ 0.10%
Reaction to fire	EN 13501-1	Bfl s1 on concrete and Cft s1 on wood substrate
Residual indentation	EN ISO 24343-1	≤ 0.05 mm
Furniture leg	EN 424	No damage
Castor chair	EN ISO 4918	No damage
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Underfloor heating	EN ISO 10456	Suitable - max. 27°C
Thermal resistance	ISO 10456	0.03 m2 K/W
Impact sound reduction	EN ISO EN 717-2	ΔLw = 2 dB
Reduction of in room impact noise	NF EN ISO 31-074	Class C (Ln, e, w < 85dB)
Light fastness	EN ISO 105-B02	≥ 6
Resistance to chemicals	EN ISO 26987	High resistance
Slip resistance	EN 13893	μ ≥ 0.30
	DIN 51130	R9
Electrical properties	EN 1015	≤ 2kV on concrete
	EN 1081	> 109 Ω
Adhesion wear layer	EN 431	≥ 50N / 50mm
Colours		10



FINZZI
SURFACES

Finzzi Corporate Offices

Calle La Cosa 57, 12200 Onda (Castellón), Spain

Finzzi Sales EU

CV-20 Avda. Mediterráneo 52, 12200 Onda (Castellón), Spain

Email adress

info@finzzi.com

Email adress

europe@finzzi.com

Website

www.finzziusa.com

Follow us

 [#finzzisurfaces](#)

 [#finzzisurfaces/](#)

 [#finzzi-surfaces/](#)