



FINZZI
SURFACES

Valley

LUXURY VINYL TILES

6 COLOURS
1 SIZE

Valley
Beech
9"x60" /
23x152cm

Valley

Neutral and versatile collection perfect both for modern and rustic spaces.

Sizes



9" x 60" / 23 x 152cm

Product Typology



LVT Glue Down



Sintered Stone®



WPC Click

Finishes




Real Touch®

Colours

Snow




Beech

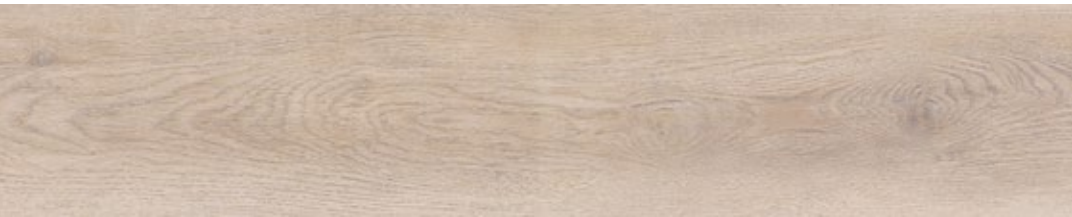


Sienna



Oak

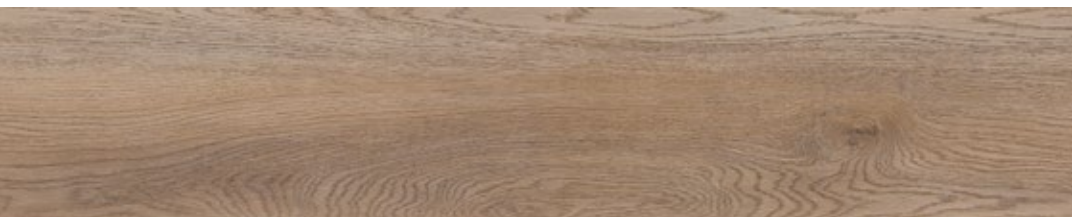

Hazel

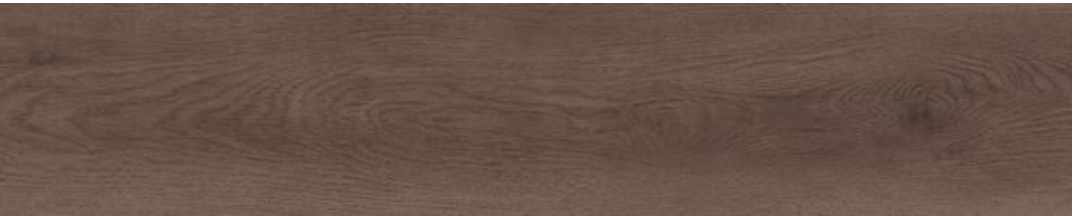

Steel



Valley Snow



Valley Beech



Valley
Beech
9"x60" /
23x152cm

FINZZI

Valley Beech



Valley
Beech
9"x60" /
23x152cm

Valley Sienna



Valley
Sienna
9"x60" /
23x152cm

Valley Oak



Valley Hazel



Valley
Hazel
9"x60" /
23x152cm

FINZZI

Valley Hazel



Valley
Hazel
9"x60" /
23x152cm

Valley Steel



Valley
Steel
9"x60" /
23x152cm

FINZZI

Valley Steel



Valley
Steel
9"x60" /
23x152cm

Product Advantages



Real Touch®
True to nature.
Real Touch®
Fiel a la naturaleza.



Elastic resilience
For greater comfort when walking, avoiding possible leaks and breaks due to impact.
Resiliencia elástica
Para un mayor comfort al caminar, evitando posibles fugas y roturas por impacto.



Strong acoustic insulation
Perfect sound deadening and noise reduction.
Fuerte aislamiento acústico
Perfecta amortiguación del sonido y reducción del ruido.



Drop'n' Click®
The perfect union.
Drop'n' Click®
La unión perfecta.



Fire prevention and flame retardant
If exist the flame, it will extinguish and not produce toxic substances and gases.
Prevención de incendios y retardante de llama
Si existe llama, se extinguirá y no producirá sustancias y gases tóxicos.



Warm flooring
Finzzi's floors offer to the space a comfortable & warm sensation.
Suelo cálido
Los suelos de Finzzi hacen posible una sensación térmica agradable.



Stain resistant & low maintenance
The top layer protects against knock and stains, they can be removed in seconds.
Resistente a las manchas y bajo mantenimiento
La capa superior protege contra golpes y manchas, pudiendo eliminarlos en segundos.



Waterproof
Moisture-resistance, ideal in kitchen or bathrooms.
Resistente al agua
Resistencia a la humedad, ideal en cocina o baños.



Floor & wall use
All our products can be applied to any surface, either floor or wall.
Uso para suelo y pared
Todos nuestros productos se pueden aplicar a cualquier superficie ya sea suelo o pared.



IXPE pad
Moisture barrier and sound proofing.
Pad IXPE
Barreda de humedad e insonorización.



Suitable for underfloor heating
Finzzi's floors are perfectly compatible with underfloor heating.
Preparado para suelo radiante
Los suelos de Finzzi son perfectamente compatibles con calefacción por suelo radiante.



Antislip
Firm under foot, with a slip resistance value of R10.
Antideslizante
Con un valor de resistencia al deslizamiento de R10.



High impact resistance
Does not leave traces or marks when supporting strong blows.
Alta resistencia al impacto
No deja huellas ni marcas al soportar golpes fuertes.



Wear Layer
Commercial grade wear layer protection.
Capa de protección
Capa de desgaste protectora para uso comercial.

PROFILING INFO



Flush stair nose A
2400x72x25mm
Escalón empotrado A
2400x72x25mm



Flush stair nose B
2400x115x25mm
Escalón empotrado B
2400x115x25mm



Skirting 90mm
2400x90x15mm
Rodapié 90mm
2400x90x15mm



Skirting 80mm
2400x80x15mm
Rodapié 80mm
2400x80x15mm



Stair nose
2400x58x18mm
Peldaño
2400x58x18mm



Reducer
2400x43x10mm
Reductor
2400x43x10mm



End-Cap
2400x35x7mm
Tapa de acabado
2400x35x7mm



T-molding
2400x46x7mm
Moldura en forma de T
2400x46x7mm



Quarter round
2400x28x16mm
Cuarto de circunferencia
2400x28x16mm

Profiling	Flooring Thickness	Pcs/box	Kg/box
T-moulding 2400x46x7mm	4~8mm	20	10
Reducer 2400x43x10mm	4~8mm	20	15
End-Cap 2400x35x7mm	4~8mm	20	14
Stair Nose 2400x54x18mm	4~8mm	10	11
Flush Stair Nose A 2400x72x25mm	4~8mm	10	15
Flush Stair Nose B 2400x115x25mm	4~8mm	10	18
Quarter Round 2400x28x16mm	4~8mm	25	17
Skirting 2400x90x15mm	4~8mm	10	20
Skirting 2400x80x15mm	4~8mm	10	11

NOTE: The thickness of the profiling might vary slightly according to the thickness of the flooring
NOTA: El espesor del perfil puede variar ligeramente de acuerdo con el espesor del suelo.

TECHNICAL INFORMATION

TECHNICAL PERFORMANCES	STANDARDS	VALLEY
Dimensional stability	EN ISO 23999	≤ 0.10%
Reaction to fire	EN 13501-1	Bfl s1 on concrete and Cft s1 on wood substrate
Residual indentation	EN ISO 24343-1	≤ 0.05 mm
Furniture leg	EN 424	No damage
Castor chair	EN ISO 4918	No damage
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Underfloor heating	EN ISO 10456	Suitable - max. 27°C
Thermal resistance	ISO 10456	0.03 m2 K/W
Impact sound reduction	EN ISO EN 717-2	ΔLw = 2 dB
Reduction of in room impact noise	NF EN ISO 31-074	Class C (Ln, e, w < 85dB)
Light fastness	EN ISO 105-B02	≥ 6
Resistance to chemicals	EN ISO 26987	High resistance
Slip resistance	EN 13893	μ ≥ 0.30
	DIN 51130	R9
Electrical properties	EN 1015	≤ 2kV on concrete
	EN 1081	> 109 Ω
Adhesion wear layer	EN 431	≥ 50N / 50mm
Colours		10



FINZZI
SURFACES

Finzzi Corporate Offices

Calle La Cosa 57, 12200 Onda (Castellón), Spain

Finzzi Sales EU

CV-20 Avda. Mediterráneo 52, 12200 Onda (Castellón), Spain

Email adress

info@finzzi.com

Email adress

europe@finzzi.com

Website

www.finzziusa.com

Follow us

 [#finzzisurfaces](#)

 [#finzzisurfaces/](#)

 [#finzzi-surfaces/](#)